TT 326

Lakeside Visitor & Education Centre

LL300

product range information

CE
EN 14041 : 2004
EN 1307

product information:

Quick and easy to lay, the TOLI LL300 range of loose lay vinyl tiles and planks are not fully adhered to the subfloor so both preparation and installation times are reduced. With high print quality and excellent dimensional stability, the tiles and planks combine good looks with ease of maintenance while the high recycled content addresses the demand for sustainability. Fully supported with warranties and tests, the LL300 range is ideal for retail, hospitality, commercial and other contract environments.

warranties:

10 year wear warranty
10 year anti-static warranty
Full warranty details available on request

specification:

Product Form	Tile	Plank
Product Dimensions	500mm x 500mm	1000mm x 250mm
Total Weight	8.2kg/m²	8.2kg/m²
Total Thickness	5mm	5mm
Wear Layer Thickness	0.7mm with PUR	0.7mm with PUR

Performance Specification

Wear Classification EN 685	Class 34 heavy contract
Castor Chair EN 425	Conform
Simulated Movement, Furniture Leg EN 424	Conform
Residual Indentation EN 433	0.07mm
Static Electrical Propensity EN 1815	< 2 kV suitable for all applications
Dimensional Stability EN 434	< 0.05mm
Impact Sound Reduction ISO 140-8	9dB
Thermal Resistance ISO 8302	0.0158m² k/w
Slip Resistance - Ramp Test DIN 51130	R9
Pendulum test - Dry BS 7976	Low potential for slip
Pendulum test - Wet BS 7976	High potential for slip
Abrasion EN 660-2	Wear group T - Class 34/43

Colour Fastness

Light BS EN 20105 Blue Scale ..... > 7

Resistance to staining / chemicals

EN 423 ..... Satisfactory; resistance to most commonly used chemical solutions

Flammability

EN 13501-1 ..... Bfl/s1

For further information and advice on installation please contact Technical Services on 01625 428922. Gradus recommends the use of Gradus XT stair edgings (www.gradusxt.com) to provide durability, definition and safety for stairs (in line with The Building Regulations 2000 - Approved Document M and BS8300:2009) and Gradus Barrier Matting to maintain the appearance of the flooring and reduce maintenance costs.

Job No. 14657

Light Reflectance Values (LRVs)

These values have been determined with reference to the CIE Tristimulus $Y_{10°}$ illuminant D65 and the 10° colorimetric observer, in accordance with BS8493 : 2008. The Y co-ordinate represents lightness and extends from 0 (black) to 100 (white) and has been used as a measure of light reflectance values (LRVs).

All Gradus products have an LRV rating, including stair edgings, skirtings, matting & wall protection, to aid with creating an inclusive environment in line with the Disability Discrimination Act (DDA). Individual colour sheets are available from Gradus customer support. For additional information or advice on LRVs, how they relate to Gradus products or a copy of a test report contact Gradus customer support on 01625 428922.

GRADUS
contract interior solutions

Gradus Carpets Park Green Macclesfield Cheshire SK11 7LZ England UK Tel: 01625 859000 Fax: 01625 850352
www.gradusworld.com
For enquiries outside the UK and Eire contact Gradus International on +44 (0)1625 613780

TOLI | modular flooring

April 2010

Uniclass L5364	EPIC E422
CI/SfB (43) Tn6	

LL300

GRADUS
contract interior solutions

TT 368

key: tile plank

- Loose lay system offers reduced installation time with less disruption
- Tiles and planks can be lifted for re-use and replacement
- Excellent dimensional stability ensures appearance retention even in high traffic areas
- Optically advanced decorative print film offers a high quality finish
- Easy and cost-effective maintenance due to PUR surface treatment
- 65% recycled content supports environmental sustainability

TT 366 LRV 35.57

TT 368 LRV 4.25

TT 369 LRV 13.52

TT 370 LRV 6.51

TT 371 LRV 2.42

TT 372 LRV 10.41

TT 308 LRV 2.90

TT 310 LRV 35.57

TT 313 LRV 13.52

TT 314 LRV 6.51

TT 315 LRV 4.25

TT 329 LRV 17.29

TT 313 & Cityscene Carpet Tile Raffia 06101

Nuffield Hospital, Cheltenham

TT 319 LRV 60.25

TT 320 LRV 45.71

TT 323 LRV 9.78



TT 324 LRV 13.04

TT 325 LRV 5.34

TT 326 LRV 19.86

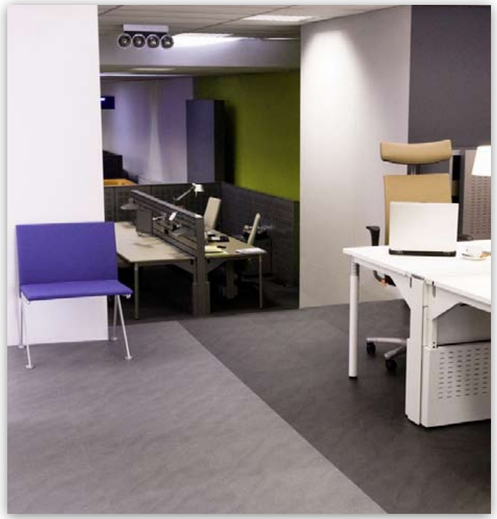

TT 326 & TT 325

TT 327 LRV 44.59

TT 328 LRV 44.30